

Features:

- Low Optical Insertion Loss
- Cost-effective CWDM technology
- Mux/Demux four Wavelengths
- Dual SC or LC connectors for interfacing
- Color Coded for ease of installation
- Reliable passive WDM optical technology
- Scales easily for ring networks
- Low-profile modular design
- Fits in 1RU 19" rack mount chassis
- Compliance with RoHS

CWDM MUX/DEMUX-4-2 Plug-in Module



The Finisar MUX/DEMUX-4-2 plug-in module is a passive optical multiplexer/demultiplexer designed for metro access applications that represents the state of the art in fiber optics design. The MUX/DEMUX-4-2 plug-in module multiplexes and demultiplexes four CWDM wavelength channels from a two-fiber circuit. Finisar's design allows the creation of cost-effective unidirectional network traffic rings or point-to-point links.

Multiplexed wavelengths are interfaced to any of Finisar's CWDM transceivers on the equipment side. A grid of eight CWDM wavelengths is available from Finisar.

The MUX/DEMUX-4-2 plug-in module plugs into one half of a 1RU, 19" rack mount chassis for simple installation and modularity. This Chassis based system allows a network equipment manufacturer to add WDM capability to any existing network device that supports GBIC and SFP interfaces.

Each equipment port of the MUX/DEMUX-4-2 plug-in module is color coded to match the wavelength of Finisar's CWDM transceiver. This allows ease of installation and troubleshooting without having to remove the transceiver from the local equipment.

The Finisar MUX/DEMUX-4-2 plug-in module delivers dramatic cost savings to network equipment manufacturers, enabling them to develop metro access systems that are lower in cost, easier to provision and simpler to operate.

MUX/DEMUX-4-2 Plug-in Module

Specifications

Mechanical

Dimensions:

8.3" x 1.7" x 10.4",
210mm x 43mm x 264mm,
plug-in for 1RU rack-mount

MUX/DEMUX-4-2 Plug-in

- Network side: 1 dual SC/PC or LC/PC
- Equipment side: 4 dual SC/PC or LC/PC

Optical

Center Wavelengths:

MUX/DEMUX-4-2 Plug-in

- 1491 nm
- 1531 nm
- 1571 nm
- 1611 nm

Directivity:

>= 55 dB

Return Loss:

>= 45 dB

Passband Ripple:

<= 0.5dB

PDL:

<= 0.15dB

PMD:

<= 0.2ps

Environmental:

- Operating 0 to 70°C
- Relative humidity: 10 to 85%, non-condensing
- Storage - 40 to 85°C


MUX/DEMUX-4-2 Plug-in Module Parameter Specifications

Passband	Max Insertion Loss (dB)		Isolation (dB)	
	Mux	DeMux	Mux	DeMux
+/- 6.5nm	2.30	2.30	>=30	>=50


Note: Connector loss included

Front Panel


SC connector front panel

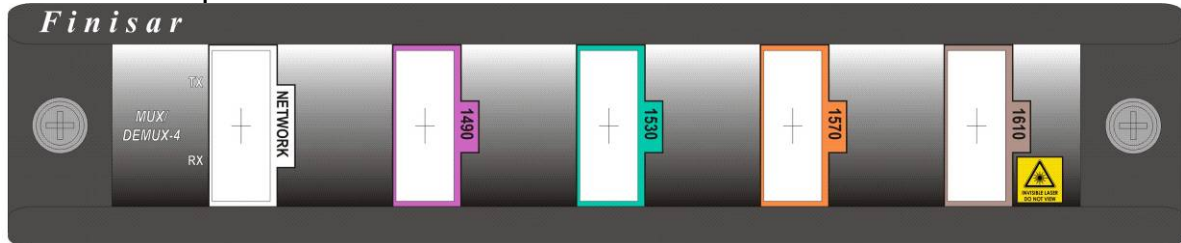

LC connector front panel

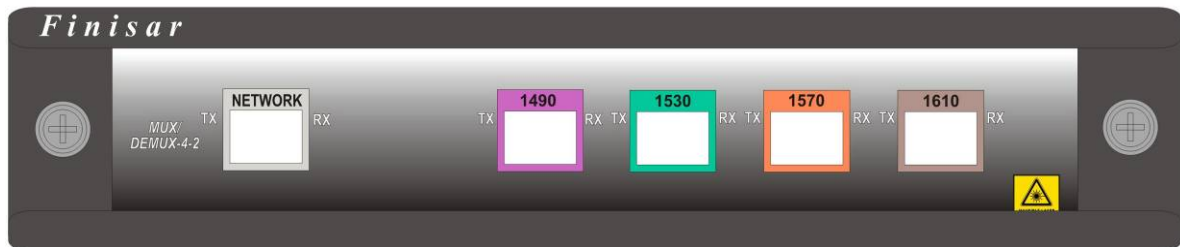

Dimensions (Unit: inch)

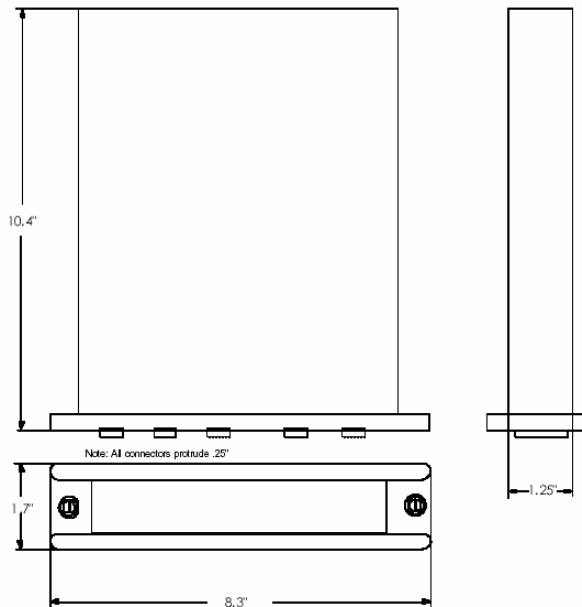

Ordering Information

Part Number Description

FWSF-M/D-4-2	Four Wavelengths MUX/DEMUX Plug-in Module for FWSF-CHASSIS-2, 1491nm, 1531nm, 1571nm, 1611nm, SC connectors
FWSF-M/D-4-2-LC	Four Wavelengths MUX/DEMUX Plug-in Module for FWSF-CHASSIS-2, 1491nm, 1531nm, 1571nm, 1611nm, LC connectors